



μ' (μ'')-Frequency

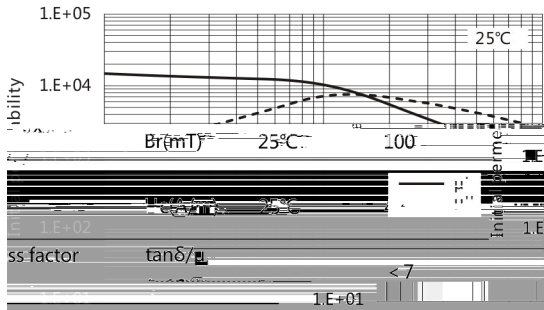


| | | | |
|----------------------------------|------------|------|-----------|
| Initial permeability | μ_i | 25°C | 15000±30% |
| Saturation magnetic flux density | B_s (mT) | 25°C | 360 |

| | | | |
|-------------------------|------------------|-------------------------------------|-------------------|
| Loss factor | $\tan\delta/\mu$ | <7 | |
| Temperature coefficient | α_{μ} | ($\times 10^{-4}/^\circ\text{C}$) | 20°C~80°C 0.5~2.0 |
| Disaccommodation factor | D_f | ($\times 10^{-6}$) | 1~10min <2.0 |


μ_i -Temperature

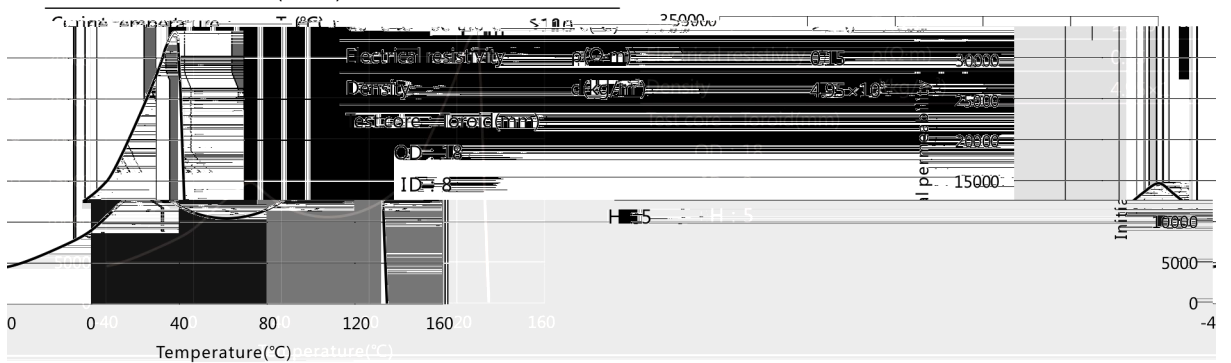

$\tan\delta/\mu_i$ -Frequency

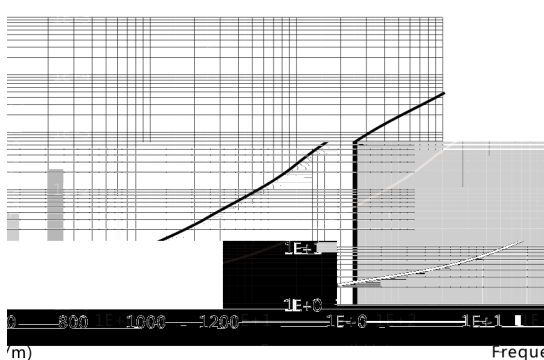


B-H

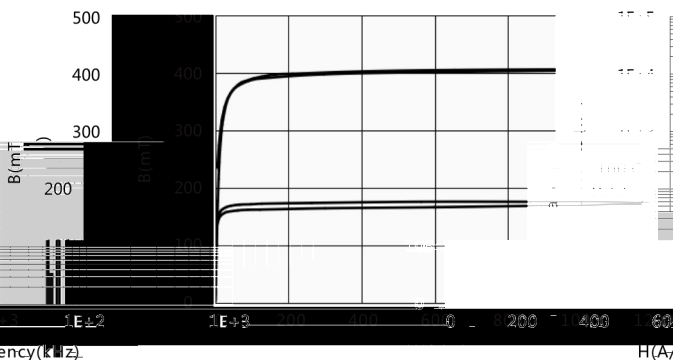

Z-Frequency

N=10TS, Φ 0.35mm, T=25°C

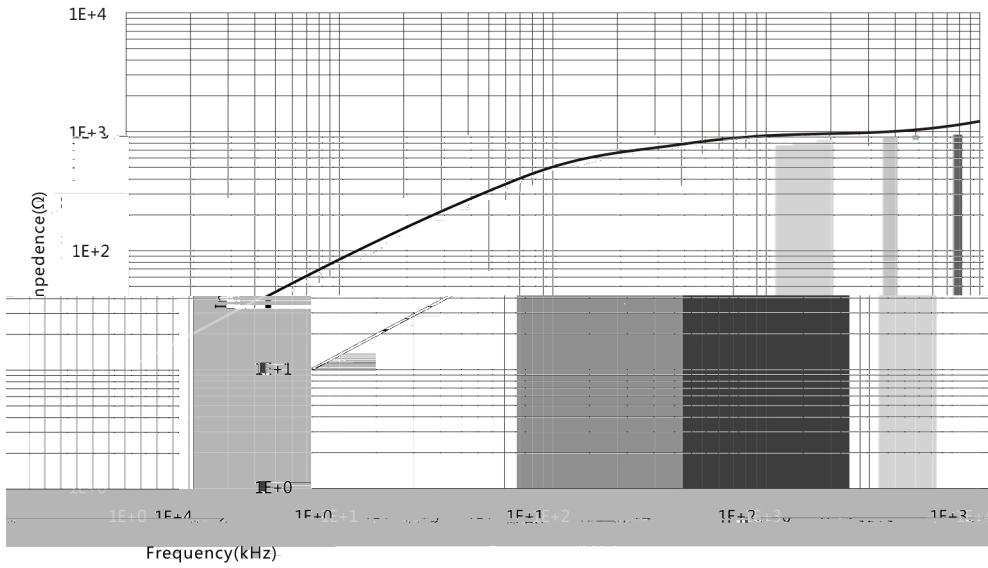

Bs-Temperature

H=1194A/m

