


**Bs-Temperature**


H=1194A/m

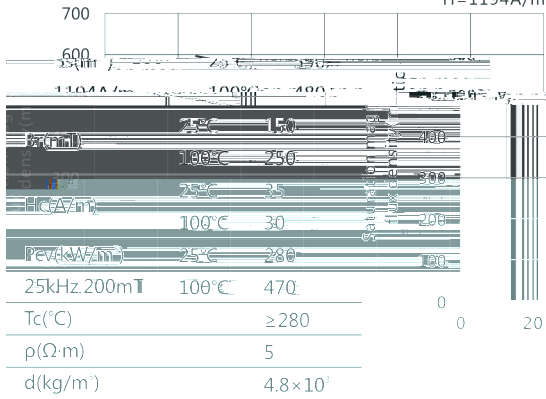


Initial permeability  $\mu_i$  25°C 1600±25%

25°C	150	
100°C	250	
25°C	35	
100°C	30	
25°C	280	
25kHz, 200mT	100°C	470
Tc(°C)	≥280	
ρ(Ω·m)	5	
d(kg/m <sup>3</sup> )	4.8×10 <sup>3</sup>	
Curie temperature		
Electrical resistivity		
Density		
Test core : Toroid(mm)		


**$\mu_i$ -Temperature**

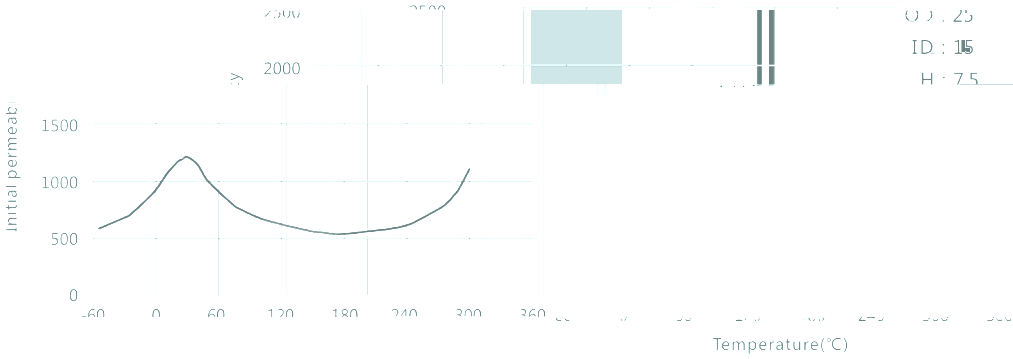


**B-H**

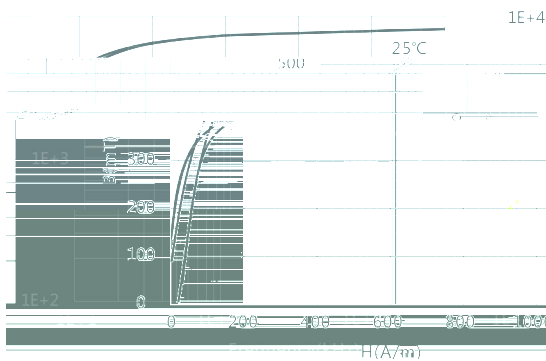


**$\mu_i$ -Frequency**

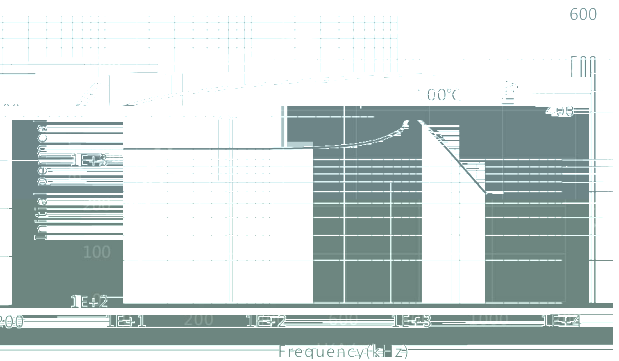


**Pcv-Temperature**

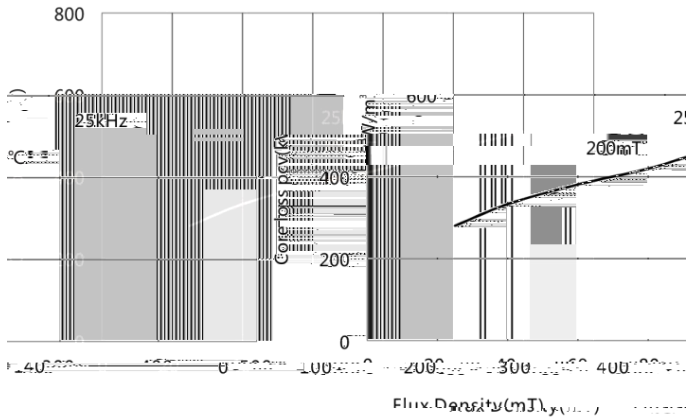

**$\mu_a$ -Bm**

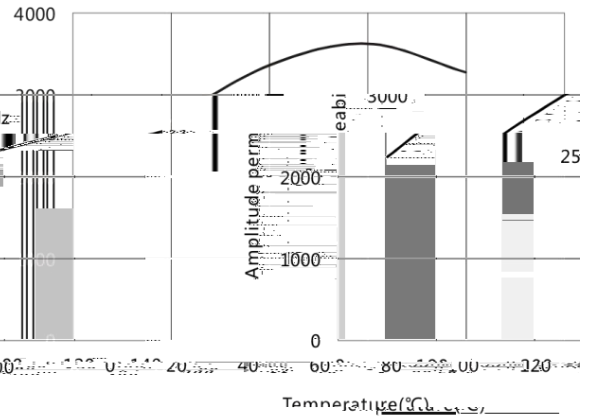

**Pcv-Bm**

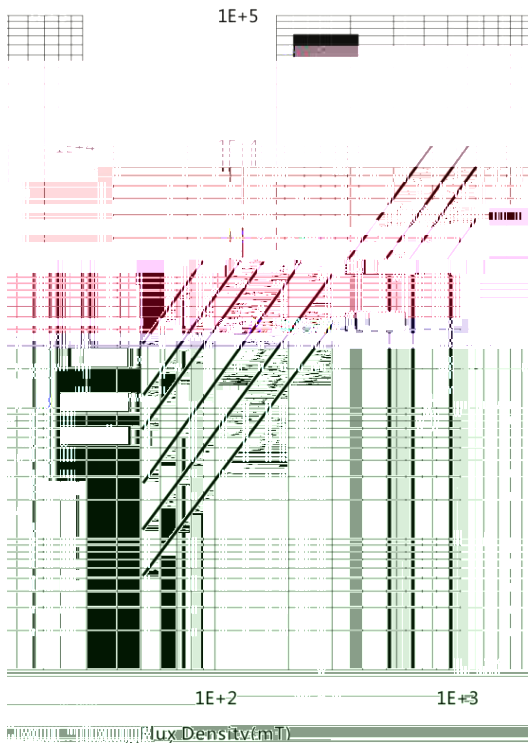

**Pcv-Bm**

